Security Services Inc.

One Town Center Road
Boca Raton, FL 33431
Phone: (561) 988-3600
FAX: (561) 988-3675

The ADT-UDACT

Universal Digital Alarm Communicator/Transmitter

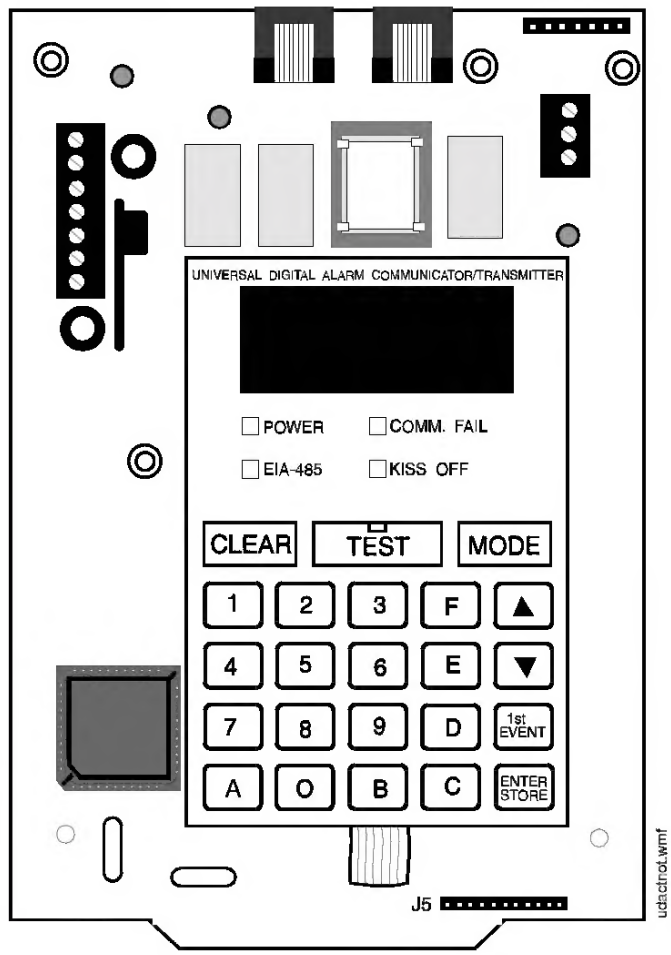

Product Information, Installation, Programming and Operation Manual

Document 50934
5/15/00 Rev: B
P/N 50934-B ECN 99-402

© 2000 ADT

WARNING

To prevent fire or shock hazard, do not expose the AC power adaptor to rain or moisture.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet.

To prevent fire, do not cover the ventilation of the apparatus with newspapers, table-cloths, curtains, etc. And don't place lighted candles on the apparatus.

To prevent fire or shock hazard, do not place objects filled with liquids, such as vases, on the apparatus.

CAUTION

The use of optical instruments with this product will increase eye hazard.

Certain countries may regulate disposal of the battery used to power this product. Please consult with your local authority.

CAUTION

- INVISIBLE LASER RADIATION WHEN OPEN
- DO NOT STARE INTO BEAM OR VIEW DIRECTLY WITH OPTICAL INSTRUMENTS

The validity of the CE marking is restricted to only those countries where it is legally enforced, mainly in the countries EEA (European Economic Area).

ATRAC3plus and ATRAC3 are trademarks of Sony Corporation.

Owner's Record

The model number is located at the rear and the serial number is located inside the lid of the CD player. Record the serial number in the space provided below. Refer to these numbers whenever you call upon your Aiwa dealer regarding this product.

Model No. XP-SN70

Serial No. _____

For the customers in the USA

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

– Reorient or relocate the receiving antenna.
– Increase the separation between the equipment and receiver.
– Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
– Consult the dealer or an experienced radio/TV technician for help.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

PRECAUTIONS

- Do not use the monitor near water, e.g. near a bathtub, washbowl, kitchen sink, laundry tub, swimming pool or in a wet basement.
- Do not place the monitor on an unstable cart, stand, or table. If the monitor falls, it can injure a person and cause serious damage to the appliance. Use only a cart or stand recommended by the manufacturer or sold with the monitor. If you mount the monitor on a wall or shelf, use a mounting kit approved by the manufacturer and follow the kit instructions.
- Slots and openings in the back and bottom of the cabinet are provided for ventilation. To ensure reliable operation of the monitor and to protect it from overheating, be sure these openings are not blocked or covered. Do not place the monitor on a bed, sofa, rug, or similar surface. Do not place the monitor near or over a radiator or heat register. Do not place the monitor in a bookcase or cabinet unless proper ventilation is provided.
- The monitor should be operated only from the type of power source indicated on the label. If you are not sure of the type of power supplied to your home, consult your dealer or local power company.
- The monitor is equipped with a three-pronged grounded plug, a plug with a third (grounding) pin. This plug will fit only into a grounded power outlet as a safety feature. If your outlet does not accommodate the three-wire plug, have an electrician install the correct outlet, or ground the appliance safely. Do not defeat the safety purpose of the grounded plug.
- Unplug the unit during a lightening storm or when it will not be used for long period of time. This will protect the monitor from damage due to power surges.
- Do not overload power strips and extension cords. Overloading can result in fire or electric shock.
- Never push any object into the slot on the monitor cabinet. It could short circuit parts causing a fire or electric shock. Never spill liquids on the monitor.
- Do not attempt to service the monitor by yourself; opening or removing covers can expose you to dangerous voltages and other hazards. Please refer all servicing to qualified service personnel.
- To ensure satisfactory operation, use the monitor only with UL listed computers which have appropriate configured receptacles marked between 100 - 240V AC, Min. 5A.
- The wall socket shall be installed near the equipment and shall be easily accessible.

Downloaded from www.Manualslib.com manuals search engine

Step1.2: If you need better performance, please choose **Optimize for performance mode** to enable **Tx Burst mode**. Or you can choose **Optimize for WiFi mode** to run in standard wireless network.

Step2: Click **Install** to begin the installation.

Step3: After the setup wizard has successfully installed wireless LAN, click **Finish** to exit the wizard.

2.3.2 For Windows Vista

Step1: Please read the following license agreement. Select **I accept the terms of the license agreement** and click **Next** to continue.

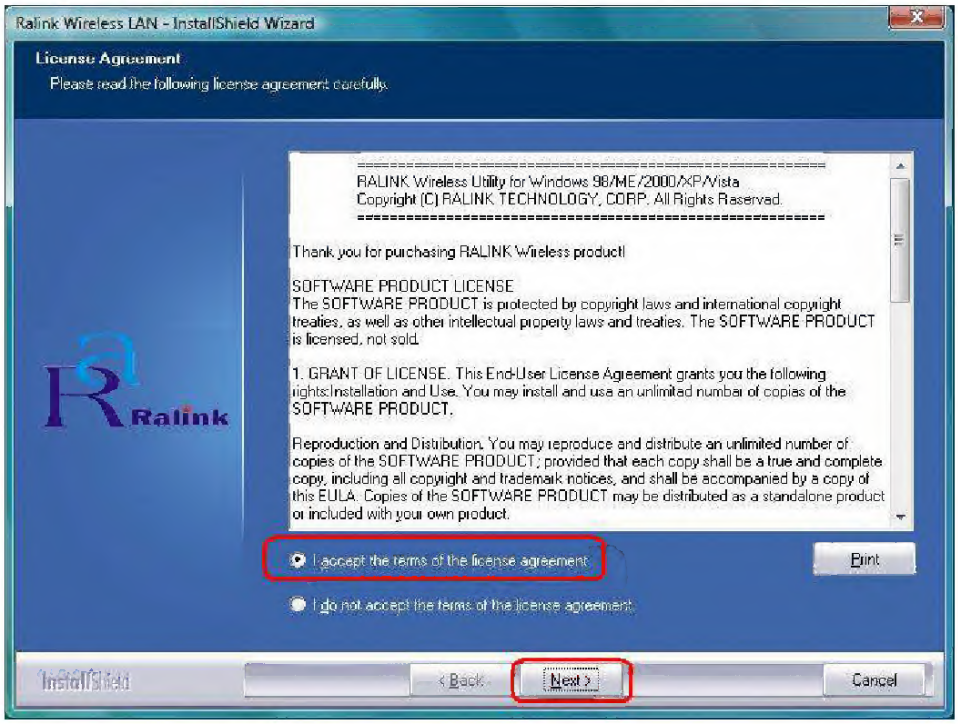
Ralink Wireless LAN - InstallShield Wizard
License Agreement
Please read the following license agreement carefully.
RALINK Wireless Utility for Windows 98/ME/2000/XP/Vista
Copyright (C) RALINK TECHNOLOGY, CORP. All Rights Reserved.
Thank you for purchasing RALINK Wireless product!
SOFTWARE PRODUCT LICENSE
The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.
1. GRANT OF LICENSE. This End-User License Agreement grants you the following rights:Installation and Use. You may install and use an unlimited number of copies of the SOFTWARE PRODUCT.
Reproduction and Distribution. You may reproduce and distribute an unlimited number of copies of the SOFTWARE PRODUCT; provided that each copy shall be a true and complete copy, including all copyright and trademark notices, and shall be accompanied by a copy of this EULA. Copies of the SOFTWARE PRODUCT may be distributed as a standalone product or included with your own product.
I accept the terms of the license agreement
I do not accept the terms of the license agreement
Print
InstallShield
< Back
Next >
Cancel

Step2: Click **Install** to begin the installation.

Step3: After the setup wizard has successfully installed wireless LAN, click **Finish** to exit the wizard.

2.4 For detailed information of Device Driver & Utility installation, please refer to the user's manual included in the Installation CD.

Downloaded from www.Manualslib.com manuals search engine

At the pcb RPM control ME-2QR-24/42-2.1: ***bridge jumper to DV 30***

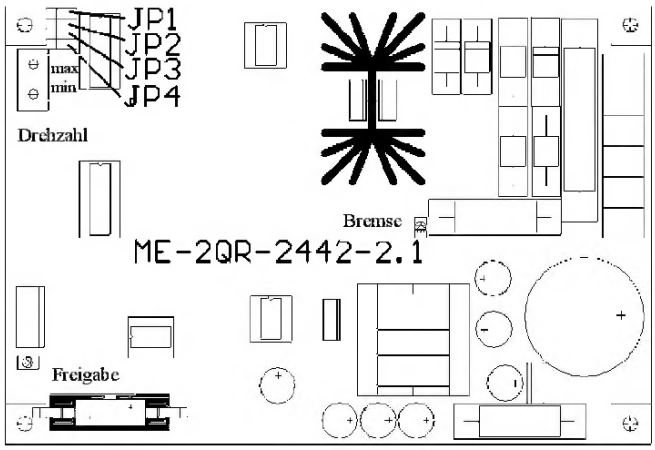

DV 30	
JP1	*opened*
JP2	*placed middle-extern*
JP3	*placed middle -extern*
JP4	*placed middle –extern*

Main switch ON
Program mode:
⇨Press botton Gas and pull back TEDAC-slide switch app. 5sec

Turn poti voltage until the upper display shows ***„dF“***
Move TEDAC-slide switch until the other display shows ***„0“***

Turn poti voltage until the upper display shows ***„dr“***
Adjust with TEDAC-slide switch until the other display shows 3.0 = 3,0 m/min.
Press torch trigger
If the wire feeding motor does not run constantly but in the right direction, change the tacho connector inside the wire feeder (cl.5 and cl.6 ⇨yellow wires);
If the motor is running in the wrong direction check the cables of the anchor;
If the motor is correctly connected, it can be adjusted with the poti energy or with TEDAC ,
If the motor is adjustable but turning to the wrong direction, the connection of the tacho and the anchor must be changed
Turning direction of the motor axe: right

LED at pcb ME-2QR-24/42-2.1
Torch trigger ON: LED "Frg" (Free green) enlightened;
Torch trigger OFF: LED "B" (Brakes yellow) enlightened shortly; LED "Frg" off;

⇨Short circuit between contact tip and work piece ⇦
Torch trigger ON
Mesure with a multimeter at pcb ME-2QR-24/42-2.1 on X3/ 1 (GND) X3/ 4 (+) app.1,2V,
DV30: *Tacho voltage on pcb ME-2QR-24/42-2.1:*
*X1 - 5-6 adjust to app. 2,93V-DC with trimmer “****min****”*

Downloaded from www.Manualslib.com manuals search engine

Contents

Chapter 1 PRODUCT DESCRIPTION

1.1 Features 9
1.2 Specifications 10
1.3 Detailed Specifications 12
1.4 Interface 12
1.5 Exterior Specifications 13
1.5.1 Explanation of Switches 13
1.5.2 Explanation of LED Indicators 13
1.5.3 Dimensions 14
1.5.4 Maximum Document Size and Placement 15
1.6 Control Codes 16
1.7 Error-Time Processing 17

Chapter 2 OPERATING PRINCIPLES

2.1 Engine Operation Outline 19
2.1.1 Carriage Unit outline 19
2.1.2 TPU Carriage Unit Outline 20
2.1.3 Carriage Moving Mechanism Operation 21
2.1.4 TPU Carriage Drive Mechanism Operation 22
2.2 Digital ICE Function Operation 23
2.2.1 Digital ICE for Film Overview 23
2.3 Operation Principle of Electric Circuit 24

Chapter 3 TROUBLESHOOTING

3.1 Overview 26
3.1.1 Self-Diagnosing 26
3.2 Troubleshooting 27

Chapter 4 Disassembly / Assembly

4.1 Overview 30
4.1.1 Precautions 30
4.1.2 Recommended Tools 30
4.1.3 Recommended Screws 30
4.2 Disassembly Procedure 31
4.2.1 Removing the TPU Unit 32
4.2.2 Removing the Upper Housing 33
4.2.3 Removing the Carriage Unit 34
4.2.4 Removing the Panel Board 36
4.2.5 Removing the Main Board 37
4.2.6 Removing the Power Switch 40
4.2.7 Removing the Panel FFC 41
4.2.8 Removing the Driven Pulley, Driven Pulley Spring, and the Driven Pulley Holder Assy. 42
4.2.9 Removing the CR Motor Unit, Motor Tension Belt, and the CR Tension Belt 43
4.2.10 Removing TPU Lower Housing 45
4.2.11 Removing the Sensor Board 46
4.2.12 Removing the Hinge Assy. 46
4.2.13 Removing the TPU Unit Cable 47
4.2.14 Removing the DRV Board 48
4.2.15 Removing Torsion Spring 49
4.2.16 Removing the TPU Carriage Unit 50
4.2.17 Removing the TPU Inverter Board 51
4.2.18 Removing the SUB_C Board, SUB_D Board, and the Lamp 53
4.2.19 Removing the TPU CR Motor 55

Downloaded from www.Manualslib.com manuals search engine

Automatic update from digital broadcast

While the TV is connected to an aerial signal. If Automatic scanning in the Upgrade Options menu is enabled, the TV wakes up at 03:00 and searches broadcast channels for new software upgrades. If new software is found and downloaded successfully, the next time the TV powers up , it will have the new software version.

Note: If the TV fails to come on after the upgrade unplug the TV for 2 minutes and plug in again.

Troubleshooting

TV will not turn on

Make sure the power cord is plugged in securely to wall outlet. The batteries in the remote control may be exhausted. Press the Power button on the TV.

Poor picture

- Have you selected the correct TV system?
- Low signal level can cause picture distortion.Please check antenna access.
- Check if you have entered the correct channel frequency if you have done manual tuning.
- The picture quality may degrade when two devices are connected to the TV at the same time. In such a case, disconnect one of the devices.

No picture

- No Picture means that your TV is not receiving a transmission. Have you selected the correct button on the remote control? Try once more. Also make sure the correct input source has been selected.
- Is the antenna connected properly?
- Is the antenna cable damaged?
- Are suitable plugs used to connect the antenna?
- If you are in doubt, consult your dealer.

No sound

- Has the TV been set to mute? To cancel mute, press the "🔇" button, or increase the volume level.
- Sound is coming from only one speaker. Is the balance set to one extreme? See Sound Menu section.

Remote control - does not operate

- The batteries may be exhausted. Replace the bateries.

Input sources - can not be selected

- If you cannot select an input source, it is possible that no device is connected. if not
- Check the AV cables and connections if you have tried to connect a device.

Recording unavailable

To record a programme, you should first connect a USB disk to your TV while the TV is switched off. You should then switch on the TV to enable recording feature. If you cannot record, try switching off the TV and then re-inserting the USB device.

USB is too slow

If a "USB is too slow" message is displayed on the screen while starting a recording, try restarting the recording. If you still get the same error, it is possible that your USB disk does not meet the speed requirements. Try connecting another USB disk.

Downloaded from www.Manualslib.com manuals search engine

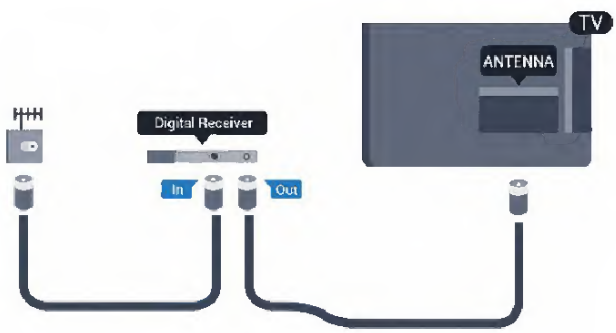



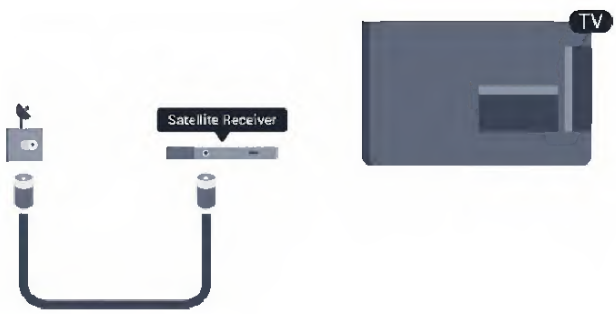

Downloaded from www.Manualslib.com manuals search engine

Base view

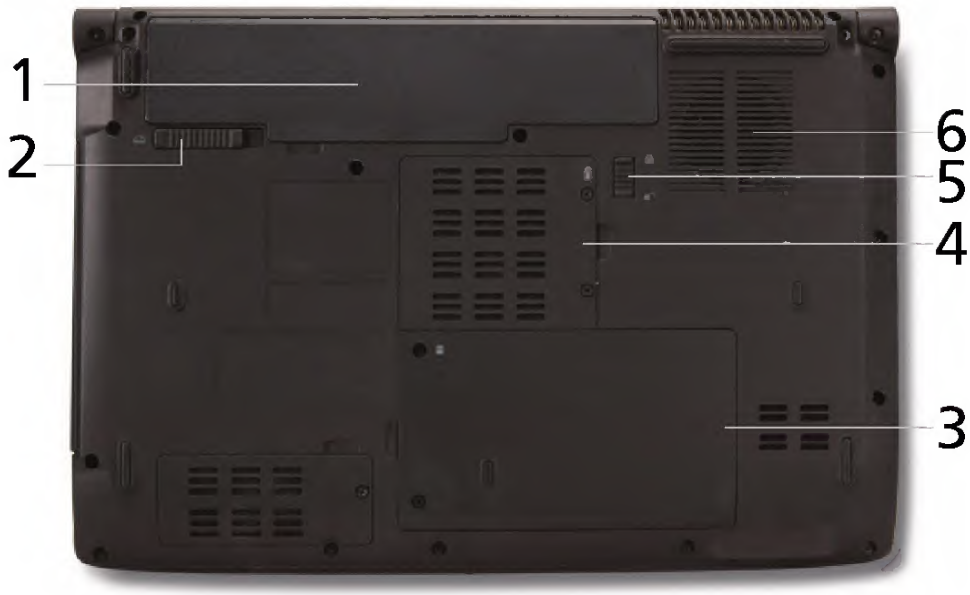

#	Icon	Item	Description
1		Battery bay	Houses the computer's battery pack.
2		Battery release latch	Releases the battery for removal.
3		Hard disk bay	Houses the computer's hard disk (secured with screws).
4		Memory compartment	Houses the computer's main memory.
5		Battery lock	Locks the battery in position.
6		Ventilation slots and cooling fan	Enable the computer to stay cool, even after prolonged use. **Note**: Do not cover or obstruct the opening of the fan.

Downloaded from www.Manualslib.com manuals search engine

26. ZOOM

Press this button to enlarge the picture when playing a DVD disc.

Press ZOOM button	**DVD player perform**
Once	Enlarge the picture 2 times of the original size
Twice	Enlarge the picture 3 times of the original size
3 times	Enlarge the picture 4 times of the original size
4 times	Picture is returned to original size

27. VOLUME DOWN (-) or UP (+)

Press to decrease or increase the volume of the wired headphones. Press to decrease or increase the level of the picture settings. The settings are available after the picture select button is pressed.

28. DVD Mode Select Button

Switches certain function keys on the remote control for DVD function.

29. MUTE

Press this button to mute the audio for wireless FMM, IR headphones and wired headphones. Pressing the button again restores the sound to the previously set level.

30. EJECT (▲)*

This button is used to eject the disc.

Downloaded from www.Manualslib.com manuals search engine

MRHH350W_FLT_MANL_ENG_MRHH330_ENG.Body 10/30/13 2:39 PM Page 16

High/Medium/Low (H-M-L) Power Button

Your radio can transmit selectively at 1, 3 or 6 watts of power. Cobra suggests you maintain the low power setting for short-range communications. You will conserve battery life and avoid overpowering nearby stations with a low power setting signal. Use the high power setting for long-range communications or when you do not receive a response to a signal sent at 1 watt.

To Toggle Between H-M-L Power Modes

Press the **H-M-L Power** button. The LCD will show which mode is in effect. Some channels are restricted for a maximum use of 1 watt. Your radio will automatically set the power to **Low Power** mode when you select those channels.

NOTE

Some channels, frequency bands and countries of use might not be able to operate in **High Power** mode.

Call/Enter/Setup Button

NOTE

A few channels are Receive only and will not transmit in these channels.

The **Call/Enter/Setup** button has multiple functions. It is generally used in the following ways:

- Press and release to transmit your unique **Call Tone** signal to another radio
- Press and hold to enter any **Setup** menu
- Functions as an **Enter** button when making a selection in any **Setup** menu

Setup Mode Programming

The following series of procedures is designed to allow you to set the programmable features of your radio. Correctly following these steps results in a minimal amount of radio setup programming time.

During setup programming, the matrix display will show text describing the programming action you are now performing.

NOTE

When in the **Setup** mode, if you stop programming for longer than 15 seconds, your entry will be saved and the radio will go back to the **Marine Standby** mode. When you return to **Setup** mode and continue programming you will see the last "value" displayed. While in the **Setup** mode, you will not receive any signal reception except when setting squelch.

Marine (VHF) Mode Programming

Programming these features will allow you to customize certain features of this radio to enhance your "On-Water" radio use.

Start from **Marine Standby** mode to begin **Marine (VNF) Setup** programming. **STANDBY** will be displayed on the matrix. Press and hold the **Call/Enter/Setup** button for two (2) seconds to enter the programming mode.

The mode programming follows this sequence:

- Squelch Level Set
- UIC Channel Map
- Tone Alert On/Off
- Call Tone Select
- Roger Beep On/Off
- Key Tone On/Off

Downloaded from www.Manualslib.com manuals search engine

SET WIRING DIAGRAM

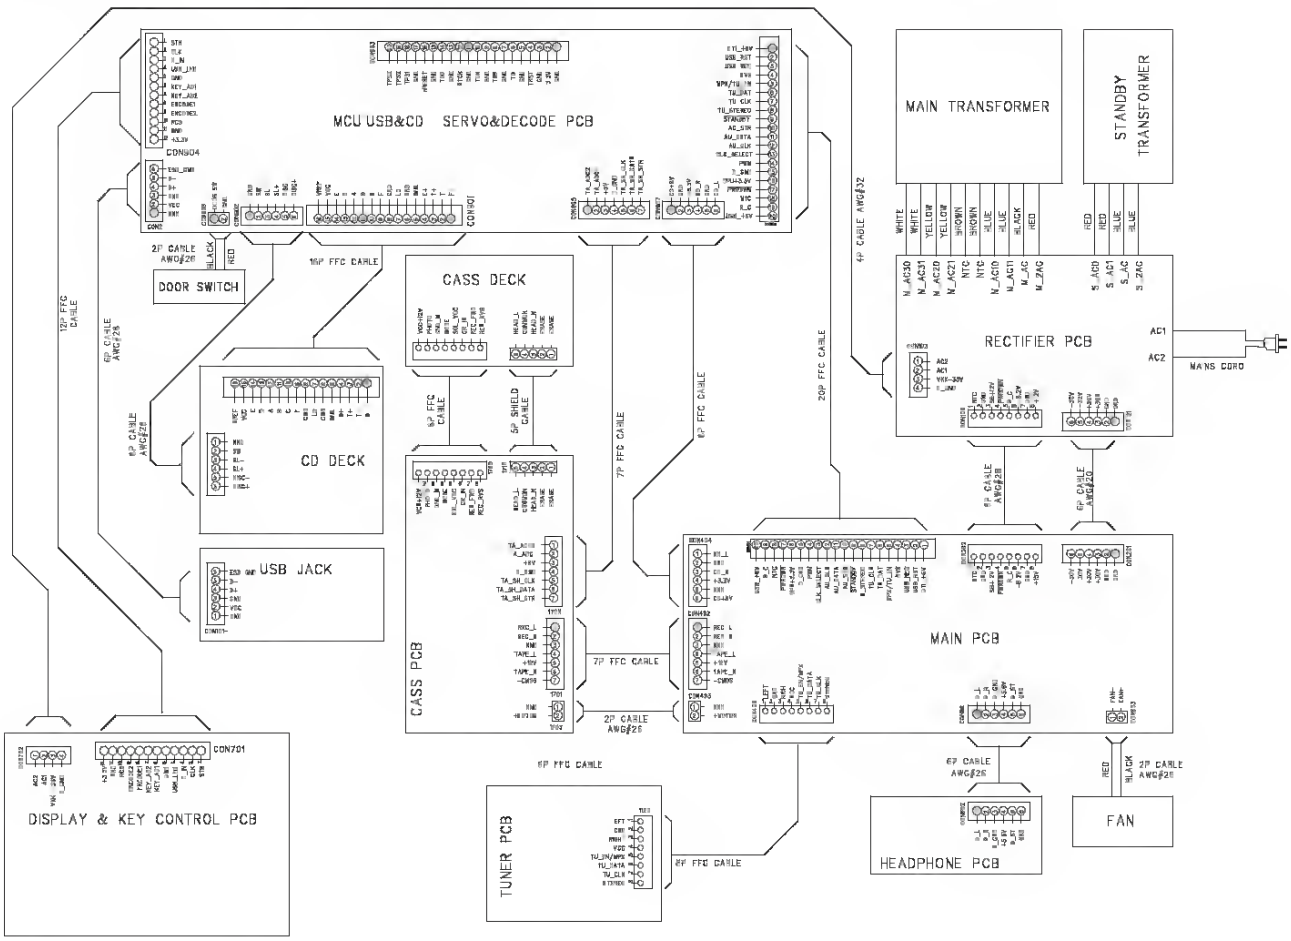

Downloaded from www.Manualslib.com manuals search engine

SECURITY MARKET

With a clearer picture of the computing security solution marketplace, enterprise decision-makers can identify and understand the implications of critical market trends on their purchasing decisions. Compaq has identified four key computing security trends that have important repercussions for enterprise customers and Compaq's own security strategy:

- the expansion of firewall functionality
- the developing need for strong identification and authentication measures
- the importance of balancing hardware and software in one's security approach
- the rapidly growing, but immature security marketplace

Security Market: Firewall Expansion

Over the past 12-18 months, firewall vendors have been aggressively expanding their security solutions to meet the multiple objectives of security (see Figure 9). To accomplish quick growth and diversification, most vendors have announced partnerships or acquisitions in order to embed their functionality and technologies, such as authentication and encryption (VPN), in the firewall and/or establish interoperability with other leading solutions. In addition, several firewall vendors have attempted to establish a common, open platform and a security middleware standard to define architecture for enterprise's complete security solution. In effect, these vendors intend for the firewall to become the management console for enterprise's security infrastructure.

As one of the most validated security solutions, a firewall's functionality was traditionally limited to network boundary access control, allowing only certain types of packets of information and applications to travel into and out of a defined network. In the early years of development, firewall vendors focused on refining their technology. They developed firewalls for multiple platforms, building their installed base by educating users about firewalls, and finding VAR or OEM partners.

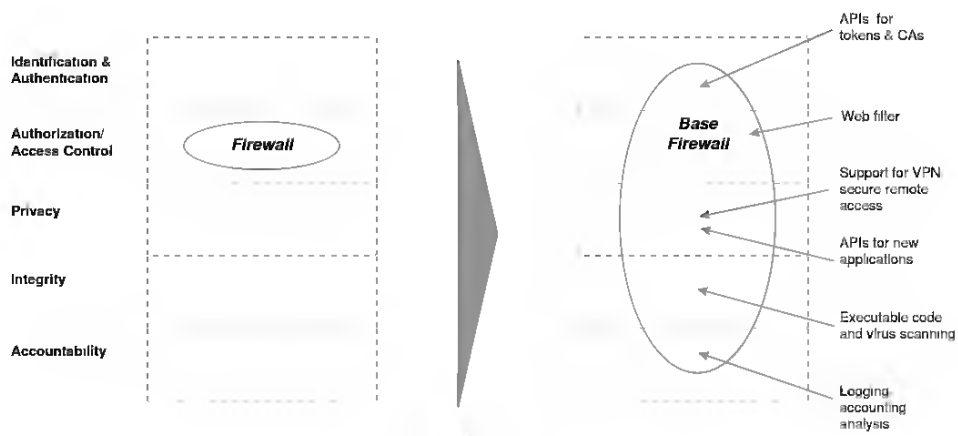

Figure 9

This past year, firewalls have finally gained significant market acceptance. Leading enterprises have recognized the necessity of firewalls and have begun to install them. Market forecasts predict triple-digit unit sales growth of firewalls through the year 2000.

Explosive growth forecasts, coupled with recognized leadership in the computing security market, have allowed firewall vendors to expand beyond traditional access control functionality to

Downloaded from www.Manualslib.com manuals search engine

7.1 Wiring a Damper Motor to the Heater's Control Module

24 Voc Power Open / Power Close Domper Motor

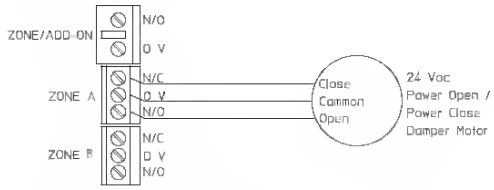

24 Voc Power Open / Spring Return Domper Motor

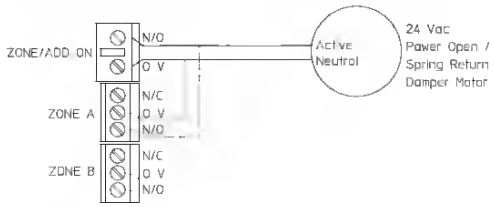

240 Voc Power Open / Power Close

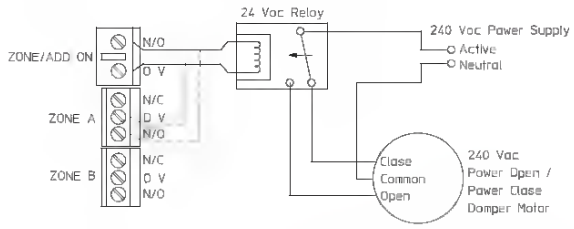

Domper Motor

8. Classic 2P Wombat Model Guidelines

8.1 Heater Dimensions

2PW 26 and 26XA

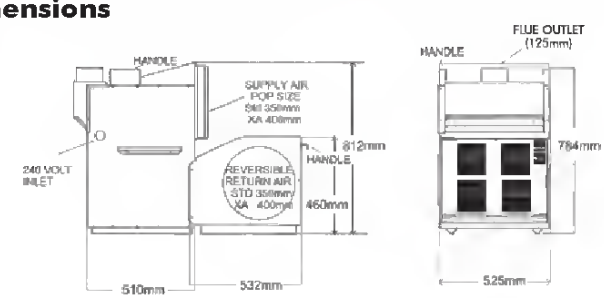

2PW 15, 20 and 20XA

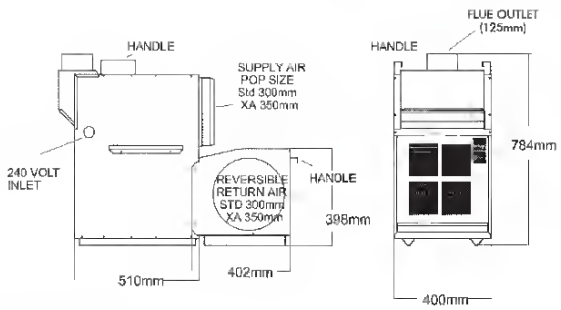

8.2 Service Clearances

Front

- A minimum clearance of 750 mm must be provided in front of the controls access panel.

Sides

- A minimum clearance of 600 mm must be provided both forward and either side of the fan motor access panels.

8.3 Internal Flueing Instructions

- The flue must be installed in accordance with AS 5601 Gas installations
- A 125mm round single or twin wall non-corrosive metal flue is required, and must be terminated with an approved 125mm round metal flue cowl.
- All flues must have a bolted flue sleeve connection to allow for repairs and/or removal of the appliance.

Downloaded from www.Manualslib.com manuals search engine

Note:
- When the door is opened during the cooking process, the cooking time on the digital display stops automatically. The cooking time starts to count down again when the door is closed and the START/QUICK button is pressed.
- If you wish to know the power level during cooking, press the POWER button once.
- You can increase or decrease the cooking time during cooking by rotating the TIMER/WEIGHT knob.
- You can change the power level during cooking by pressing the power button.
- To cancel a programme during cooking, touch the STOP button twice.

Kitchen timer

Example: To set the kitchen timer for 7 minutes.

1. Press the power level button 7 times.



2. Enter the time by rotating the TIMER/WEIGHT knob clockwise/ anti-clockwise until 7:00 is displayed.



3. Press the START/QUICK button.

4. Check the display:

Note:
- To pause the timer, press the STOP button. To resume the timer press START/QUICK, to exit press STOP again.

Add 30 seconds

The START/QUICK button allows you to operate the two following functions:

1. **Direct Start**
   You can directly start cooking on 900 W/HIGH microwave power level for 30 seconds by pressing the START/QUICK button.



2. **Extend the cooking time**
   You can extend the cooking time for multiples of 30 seconds if the button is pressed while the oven is in operation.



Note:
- You can also use +30 seconds during grill mode.
- You cannot use this function during AUTO COOK or AUTO DEFROST.

Downloaded from www.Manualslib.com manuals search engine

Section 5

Technical Support

E-mail: support@airlink101.com

Toll Free: 1-888-746-3238

Website: www.airlink101.com

*Theoretical maximum wireless signal rate based on IEEE standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, mix of wireless products used, radio frequency interference (e.g., cordless telephones and microwaves) as well as network overhead lower actual data throughput rate. Specifications are subject to change without notice. All products and trademarks are the property of their respective owners. Copyright ©2008 AirLink101®

Downloaded from www.Manualslib.com manuals search engine

Connecting the power cord

- Check first to make sure that the power cord you use is the correct type required for your area.
- The monitor has a universal power supply that allows operation in either 100/120 V AC or 220/240 V AC voltage area. No user-adjustment is required.
- Plug one end of the power cord to the AC inlet, and plug the other end into an AC outlet.
- For units using 120 V AC:
  Use a UL-listed cord set, type SVT wire and plug rated 10 A/125 V.
- For units using 220/240 V AC:
  Use a cord set consisting of H05VV-F cord and plug rated 10 A/250 V. The cord set should have the appropriate safety approvals for the country in which the equipment will be installed.

Power saving

The monitor will be switched to "power saving" mode by the control signal from the display controller, as indicated by the amber-colored power LED.

Mode	LED light
On	Blue
Power saving	Amber

The power saving mode will be kept until a control signal has been detected or the keyboard or mouse is activated. The recovery time from "power saving" mode back to "on" is around 3 seconds.

Display Data Channel (DDC)

To make installation easier, so long as your system supports the DDC protocol, the monitor is able to plug-and-play. The DDC is a communication protocol through which the monitor automatically informs the host system about its capabilities; for example, supported resolutions and corresponding timing. The monitor supports the DDC2B standard.

Downloaded from www.Manualslib.com manuals search engine

Bottom view

No.	Label	Description
1	Soft reset switch	A soft reset allows your handheld to get a fresh start, similar to rebooting a computer. All records and entries are retained after a soft reset.
2	Proprietary 26-pin I/O connector	Connects your handheld to a portable or desktop computer and DC power supply to an AC wall outlet to charge the battery. - USB Host - USB Client - Serial - DC power in
3	Hard reset switch	Toggle to return you handheld settings to the factory defaults. See "Performing a hard reset" on page vii.

Preparing to use your Acer n30

Perform the following easy installation tasks to begin using your handheld:

- Install the Microsoft® ActiveSync® software in your computer
- Connect the cable
- Charge your handheld
- Set up your handheld
- Perform the first ActiveSync operation

Downloaded from www.Manualslib.com manuals search engine

152963991en per CH.qxp 03/08/2004 13.39 Pagina 19

For washing in the dishwasher the following cutlery/dishes	
are not suitable:	**are of limited suitability:**
• Cutlery with wooden, horn, china or mother-of-pearl handles • Plastic items that are not heat resistant • Older cutlery with glued parts that is not temperature resistant • Bonded cutlery items or dishes • Pewter or copper items • Lead crystal glass • Steel items subject to rusting • Wooden platters • Items made from synthetic fibres	• Only wash stoneware in the dishwasher if it is specifically marked as being dishwasher-safe by the manufacturer. • Glazed patterns may fade if machine washed frequently. • Silver and aluminium parts have a tendency to discolour during washing. Left-overs, e.g. egg white, egg yolk and mustard often cause discolouring and staining on silver. Therefore always clean left-overs from silver immediately, if it is not to be washed straight after use. • Some types of glass can become dull after a large number of washes.

Open the door and slide out the baskets to load the dishes.

The lower basket

The lower basket is designed to take saucepans, lids, plates, salad bowls, cutlery etc.

Serving dishes and large lids should be arranged around the edge of the basket, ensuring that the spray arms can turn freely.





Downloaded from www.Manualslib.com manuals search engine

Abbreviation	Meaning
RW	Read/Write Bits and fields can be read and written.
RW,*n*	Read/Write, and takes the value *n* at power-on reset. Bits and fields can be read and written.
W1C	Write One to Clear If read operations are allowed to the register, then the value may be read by software. If it is a write-only register, then a read operation by software returns an UNPREDICTABLE result. Software write operations of a 1 cause the bit to be cleared by hardware. Software write operations of a 0 do not modify the state of the bit.
W1S	Write One to Set If read operations are allowed to the register, then the value may be read by software. If it is a write-only register, then a read operation by software returns an UNPREDICTABLE result. Software write operations of a 1 cause the bit to be set by hardware. Software write operations of a 0 do not modify the state of the bit.
WO	Write Only Bits and fields can be written but not read.
WO,*n*	Write Only, and takes the value *n* at power-on reset. Bits and fields can be written but not read.

- Sign extension

  SEXT(x) means *x* is sign-extended to the required size.

Addresses

Unless otherwise noted, all addresses and offsets are hexadecimal.

Aligned and Unaligned

The terms *aligned* and *naturally aligned* are interchangeable and refer to data objects that are powers of two in size. An aligned datum of size 2*n* is stored in memory at a byte address that is a multiple of 2*n*; that is, one that has *n* low-order zeros. For example, an aligned 64-byte stack frame has a memory address that is a multiple of 64.

A datum of size 2*n* is *unaligned* if it is stored in a byte address that is not a multiple of 2*n*.

Bit Notation

Multiple-bit fields can include contiguous and noncontiguous bits contained in square brackets ([]). Multiple contiguous bits are indicated by a pair of numbers separated by a colon [:]. For example, [9:7,5,2:0] specifies bits 9,8,7,5,2,1, and 0. Similarly, single bits are frequently indicated with square brackets. For example, [27] specifies bit 27. See also Field Notation.

Caution

Cautions indicate potential damage to equipment or loss of data.

Downloaded from www.Manualslib.com manuals search engine

Menù Articoli/ Articulo deMenú/ メニュー・アイテム	Sub Menù Articoli/ Articulo de Sub Menú/ サブメニュー・アイテム	Funzioni	Función	機能
Luminance	Contrast	regola la differenza tra le zone chiare e quelle scure	ajusta la differencia entre las áreas claras y ascuras	画面上の領域の明暗の調整します
	Brightness	regola la luminositá della visualizzazione	ajusta el brillo de la pantalla	ディスプレイの明るさを調整します
Geometry	Hor. Position	regola la posizione orizzontale della visualizzione	ajusta la posición horizontal de la pantalla	ディスプレイの水平位置を調整します
	Hor. Size	regola l'ampiezza della visualizzazione	ajusta el ancho de la pantalla	ディスプレイの幅を調整します
	Ver. Position	regola la poizione verticale della visualizzazione	ajusta la posición vertical de la pantalla	ディスプレイの垂直位置を調整します
	Ver. Size	regola l'altezza verticale della sixualizzazione	ajusta la altura vertical de la pantalla	ディスプレイの高さを調整します
	Rotation	corregge lo schermo inclinato	corrige la pantalla inclinada	斜めになったスクリーンを調整します
	Pincushion	corregge la curva ed i bordi verticali della visualizzazione	corrige la curva de los lados verticales de la pantalla	ディスプレイの垂直辺の歪みを修正します
	Unbalance	regola il bilanciamento quando i lati della visualizzazione sono piegati a sinistra o a destra	ajusta el equillibrio cuando los lados de la pantalla están arqueados	ディスプレイの両脇の歪みを修正します
	Trapezoid	rende parallelo il bordo verticale della visualizzazione	pone paralelo el lado vertical de la pantalla	ディスプレイの垂直辺を並行に修正します
	Parallelogram	corregge le distorsioni dell'immagine	corrige las distorsiones de la imagen	イメージのゆがみを調整します
	Top corner	regola i bordi degli angoli superio dell'immagine su schermo	ajusta los laterales de las imagenes de las esquinas superiors de la pantalla	画面上段のコーナー歪みを修正することができます
	Bottom corner	regola i bordi degli angoli inferiori dell'immagine su schermo	ajusta los laterales de las imagenes de las esquinas inferiors de la pantalla	画面下段のコーナー歪みを修正することができます

二、 Disassemble the battery

According to the pictures below，raise up from the slot sign，then take it out。

三、 Disassemble the bottom cover

（1.） Using the cross screwdriver，disassemble the 8 screws of picture marked，using plastic bar to insert the gap between top cover and bottom cover down the four sides, and take it。

Downloaded from www.Manualslib.com manuals search engine

H2TU-C Bantam Jacks

The front panel of an H2TU-C module contains both metallic splitting (**EQ**) and monitor (**MON**) bantam jacks.

The **EQ** jacks provide an *intrusive* access point, interrupting signal access to the local loop. This will enable the user to transmit a test signal toward an H2TU-R module and to receive a test signal from an H2TU-R module.

The **MON** jacks, when connected to a bit-error rate test set that is configured for monitor (bridging) mode, provide a *nonintrusive* test access point for observing the transmit or receive signal. In this configuration, synchronization, test patterns, and other functions can be observed.

Alternatively, the **MON** jacks can also be used for intrusive testing toward the network. To utilize this configuration, perform the following steps:

1. Disconnect the H2TU-C DSX-1 interface by opening both the metallic splitting **TX** and **RX EQ** jacks with either a bantam open plug or a bantam test cord that is not terminated.
2. Configure a test set for Terminate mode.
3. Connect the test set to the **MON** jacks. (Test access toward the network equipment is achieved).
4. Connect the output (TRANS) of the test set to the **MON RX** jack, and the input (REC) of the test set to the **MON TX** jack.

> **NOTE**
>
> For additional Bantam Jack testing from the Total Access 3000 H2TU-C (P/N 1181113L2), refer to "Appendix C, Front Panel DSX and MUX Mode Test Access".

H2TU-R Bantam Jacks

The DS1 monitoring from the H2TU-R is accomplished using the **MON** bantam jacks.

The jacks labeled **MON** provide a test access point for monitoring the transmit and receive signals at the DS1 interface point. The bridging jacks can be used in two different ways:

1. The bridging jack of an H2TU-R module provides a *nonintrusive* tap onto a signal line and permits the connection of test equipment to monitor the characteristics of the signal with the DS1 test set optioned for Bridging mode.
2. If the DS1 test set is optioned for Terminate mode and the customer DS1 is disconnected, then the bridging jack of an H2TU-R module provides an *intrusive* tap and could be used to transmit and receive signals between an H2TU-R module and the network.

Figure 7 illustrates the complete bantam jack arrangement and details for specific jacks.

4. 6 CONTRAST

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "CONTRAST" option.

Step 3: Press PLAY to select the contrast level you prefer.



There are 16 levels to choose from.

4. 7 LANGUAGE

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "LANGUAGE" option.

Step 3: Press PLAY to select the display language.

There are three modes to choose from:

1. 中文简体
2. 中文繁體
3. ENGLISH

4. 8 VERSI ON

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select "VERSION" to see the version.

Note: The version of the software refers to the machine.

4. 9 SN

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "SN" option to see the serial

Downloaded from www.Manualslib.com manuals search engine